



Important

Please open this form in Adobe Acrobat.
It has interactive elements which may not function correctly
if opened in your web browser.

If you don't have Adobe Acrobat Reader installed, you can download it here:

<https://get.adobe.com/reader/>

Bivona™ Customise Fixed Flange Tracheostomy Tube Template

1. Shaft Length



1a. Shaft Length _____ mm (30 mm min, 140 mm max) Shaft length measured at center line

2. Shaft

| I.D. | O.D. | I.D. | O.D. | I.D. | O.D. | I.D. | O.D. | I.D. | O.D. |
|---------------------------|------|---------------------------|------|---------------------------|------|---------------------------|------|---------------------------|------|
| <input type="radio"/> 2.5 | 4.0 | <input type="radio"/> 4.0 | 6.0 | <input type="radio"/> 5.5 | 8.0 | <input type="radio"/> 7.0 | 10.0 | <input type="radio"/> 8.5 | 11.8 |
| <input type="radio"/> 3.0 | 4.7 | <input type="radio"/> 4.5 | 6.7 | <input type="radio"/> 6.0 | 8.7 | <input type="radio"/> 7.5 | 10.4 | <input type="radio"/> 9.0 | 12.3 |
| <input type="radio"/> 3.5 | 5.3 | <input type="radio"/> 5.0 | 7.3 | <input type="radio"/> 6.5 | 9.4 | <input type="radio"/> 8.0 | 11.0 | <input type="radio"/> 9.5 | 13.3 |


3. Connector (check one box only)

☐ 3a. Swivel 2.5–9.5 mm ☐ 3b. Fixed 2.5–5.5 mm ☐ 3c. No ISO Connector



Note: Product cannot be connected to any circuit or adaptor.

Note: Cuffless product only

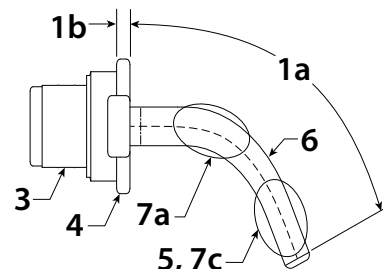


4. Neck Flange (check one box only)


| With or Without Swivel Connector | | | Without Connector | Fixed Connector Only | | |
|---|---|---|---|---|---|---|
| <input type="checkbox"/> 4a. 2.5–5.5 mm | <input type="checkbox"/> 4b. 2.5–9.5 mm | <input type="checkbox"/> 4c. 2.5–9.5 mm | <input type="checkbox"/> 4d. 2.5–9.5 mm | <input type="checkbox"/> 4e. 2.5–4.0 mm | <input type="checkbox"/> 4f. 2.5–5.5 mm | <input type="checkbox"/> 4g. 2.5–5.5 mm |
| | | | | | | |
| Neck Flange Length: 60 mm | Neck Flange Length: 67 mm | Neck Flange Length: 83 mm | Neck Flange Length: 67 mm | Neck Flange Length: 47 mm | Neck Flange Length: 59 mm | Neck Flange Length: 59 mm |

5. Cuff (check one box only)


☐ 5a. TTS Tight to Shaft ☐ 5b. Aire-Cuf™ Pedi ☐ 5b. Aire-Cuf Adult ☐ 5c. Fome-Cuf™ ☐ 5d. Cuffless




2.5–9.5 mm




2.5–5.5 mm



5.0–9.5 mm




2.5–9.5 mm




2.5–9.5 mm

6. Shaft Option

☐ 6a. Std. Curved ☐ 6b. Hyperflex



2.5–9.5 mm



2.5–9.5 mm

7. Optional

☐ 7a. Proximal (Top) Cuff ☐ 7b. Stoma Seal ☐ 7c. Distal (Bottom) Cuff

☐ TTS Cuff

☐ Aire-Cuf

☐ Fome-Cuf

☐ Pediatric

☐ Adult

Cuff position from Neck Flange _____ mm

Note: Minimum distance 2 mm

☐ Solid Silicone

_____ mm O.D.

_____ mm Length

☐ Tapered

☐ Non Tapered

Cuff distance from tip to shaft _____ mm

Note: Cuff distance from tip cannot be less than the minimum standard distance listed below:

a. Pediatric TTS, Aire-Cuf & Fome-Cuf – 3 mm

b. Adult Aire-Cuf & Fome-Cuf – 5 mm

c. Adult TTS – 9 mm

☐ 7d. Talk Attachment

5.0 mm I.D. Adult shaft or above only

☐ 7e. Extra Horizontal Length _____ mm (30 mm max)

8. Approval Please note: ICU Medical will review the completed template for compliance.

Any required modifications will be made with the approval of a clinician.

Hospital/Clinic _____

Clinician Name _____ Clinician Title _____

P.O. Number _____ Date _____

9. Select Type of Service

☐ Standard service (sterile)

☐ Express service (non-sterile)

☐ Standard service (non-sterile)

Our Terms and Conditions of Sale for Europe (<http://www.icumed.com/support/customer-support-documents/terms-and-conditions-of-sale>) are the only terms or conditions which apply to any contracts between ICU Medical group companies ("ICU Medical") and a customer in relation to purchases of products and/or services. Unless otherwise authorised by ICU Medical in writing, no other terms shall apply between ICU Medical and any customer for the purchase of such products or services.

The product complies with current legislation and has the corresponding CE marking.
For additional information, warnings and / or safety precautions, refer to the Instructions for Use.